
Edificio Genebre. Av. de Joan Carles I, 46-48
08908 L'Hospitalet de Llobregat. Barcelona (Spain)
genebre@genebre.es - www.genebre.es


ARTICULO: 2008N
Válvula de esfera 2 piezas Inoxidable.
Stainless steel ball valve, 2 piece.

Características
1. Válvula esfera paso reducido 2 piezas
2. Extremos roscados según ASME B1.20.1 NPT.
3. Construcción en Inox. 1.4408 (CF8M).
4. Asientos PTFE + 15 % F.V.
5. Vástago inexpulsable.
6. Sistema de bloqueo de seguridad.
7. Presión de trabajo máxima 140 bar.
8. Temperatura de trabajo –25 ºC + 180 ºC.

Features
1. Stainless steel reduce port ball valve, 2 piece.
2. Thread ends according to ASME B1.20.1 NPT.
3. Made of stainless steel 1.4408 (CF8M).
4. Ball seats PTFE + 15 % G.F.
5. Blow-out proof stem.
6. Device locking system.
7. Max. Working pressure 140 bar.
8. Working Temperature –25 ºC + 180 ºC.



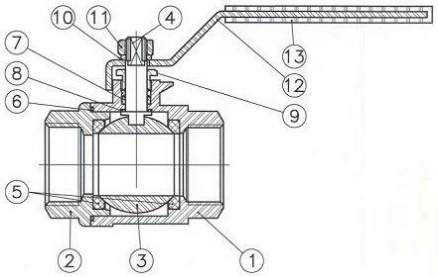

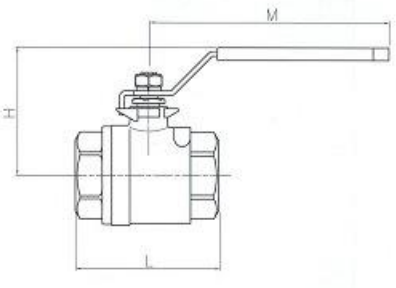


Nº	Denominación / *Name*	Material	Acabado Superficial / *Surface Treatment*
1	Cuerpo / *Body*	Acero Inox. / *Stainless steel 1.4408*	Granallado / *Shot blasting*
2	Tapa / *Cap*	Acero Inox. / *Stainless steel 1.4408*	Granallado / *Shot blasting*
3	Bola / *Ball*	Acero Inox. / *Stainless steel 1.4408*	------
4	Eje / *Stem*	Acero Inox. / *Stainless steel AISI 316*	------
5	Asiento / *Ball seat*	PTFE + 15% F.V. / *G.F.*	------
6	Junta / *Gasket*	PTFE	------
7	Arandela / *Trust Washer*	PTFE	------
8	Anillo fricción / *Friction ring*	PTFE	------
9	Tuerca Prensa / *Stem packing*	Acero Inox. / *Stainless steel AISI 304*	------
10	Arandela / *Washer*	Acero Inox. / *Stainless steel AISI 304*	------
11	Tuerca / *Nut*	Acero Inox. / *Stainless steel AISI 304*	------
12	Maneta / *Handle*	Acero Inox. / *Stainless steel AISI 304*	------
13	Funda / *Handle Sleeve*	Vinilo / *Vynil*	------

Edificio Genebre. Av. de Joan Carles I, 46-48
08908 L'Hospitalet de Llobregat. Barcelona (Spain)
genebre@genebre.es - www.genebre.es

DIMENSIONES GENERALES / *GENERAL DIMENSIONS*

Ref	Medida / *Size*	PN	Dimensiones / *Dimensions* (mm)				Peso / *Weight* (g)
			P	H	L	M	
2008N 02	1/4"	140	9.5	42	54	105	240
2008N 03	3/8"	140	9.5	42	54	105	220
2008N 04	1/2"	140	13	46	61.5	105	320
2008N 05	3/4"	140	17.5	53	71.7	147	600
2008N 06	1"	140	22	58	84.5	168	890
2008N 07	1 1/4"	140	25.4	68	92	193	1210
2008N 08	1 1/2"	140	31.7	72	102.7	193	1750
2008N 09	2"	140	38.1	78	118.2	193	2680

CURVA PRESION TEMPERATURA / *PRESSURE TEMPERATURE RATING*

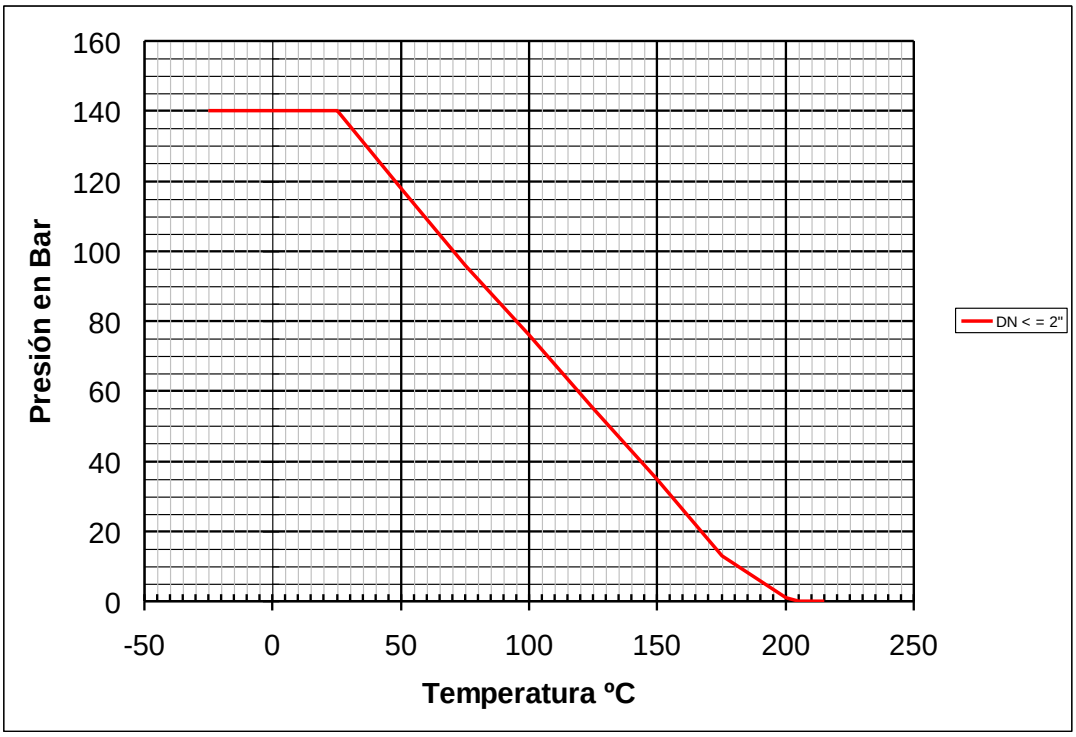

VALORES DE Kv / *Kv VALUES*

Kv = Es la cantidad de metros cúbicos por hora que pasará a través de la válvula generando una perdida de carga de 1 bar.
Kv = The rate of flow of water in cubic meter per hour that will generate a pressure drop of 1 bar across the valve.

1/4"	3/8"	1/2"	3/4"	1"	1 ¼"	1 ½"	2"
10	10	18	38	75	83	130	205